

产品. 规格书

PRODUCT SPECIFICATION

产品名称

Product Name

白光下雪灯

产品编号

Product Number

LY-RGB-16

规格

Parameter

47*81.05*87.44

东莞市蓝宇激光有限公司

Dongguan Blueuniverse Laser Co.,Ltd

DESCRIPTION.:

(规格书)

SPECIFICATION

THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co.,Ltd
AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE
MANUFACTURE OR SELL
OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

Model No.:

日期

制定

品管

审核

核准

Document No.:

LY-WI-RD-F0314


REV

A0


光电参数
PHOTOELECTRIC PARAMETER

项 目 Item	参 数 parameter	示 意 图 Schematic diagram
外形尺寸： Dimensions	47*81.05*87.44	
输出功率： Output Power	>150mW	
蓝光功率： Blue light power	>50mW	
绿光功率： Green power	>45mW	
红光功率： Red light power	>40mW	
输入电压： Input Voltage	12V	
输入电流： Input Current	1000mA	
贮存温度： Storage Temperature	- 40℃至85℃	
工作温度： Working Temperature	- 10℃至60℃	
工作时间： Service Life	>8000H	
东莞市蓝宇激光有限公司 Dongguan Blueuniverse Laser Co.,Ltd		DESCRIPTION. : (规格书) SPECIFICATION
THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co.,Ltd AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.		Model No. :
		Document No. : LY-WI-RD-F0314
		REV A0

外形尺寸 DIMENSIONS

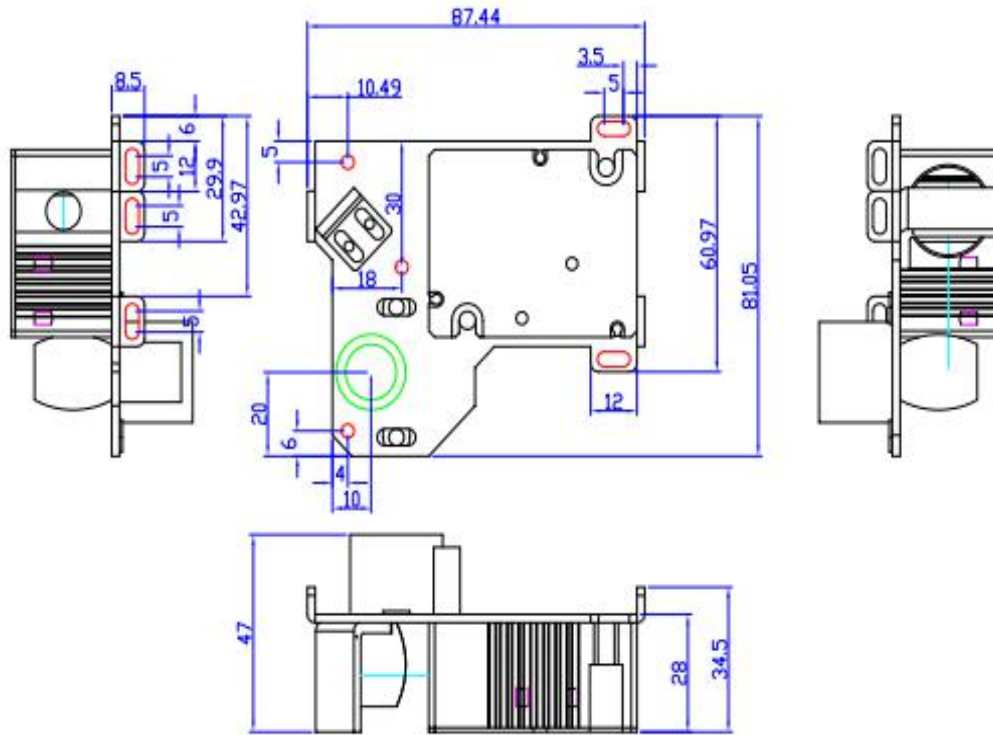

UNITS: MM



UNSPECIFIED DIMENSION TOL(GB/T1804-92)

DIM	TOL	COARSENESS	COARSENESS
0.5~3		±0.02	±0.04
3~6		±0.05	±0.1
6~30		±0.1	±0.2
30~120		±0.2	±0.8
120~400		±0.5	±1.2

UNSPECIFIED ANGLE TOL(GB11359-89-M) ±1°

Form No: FR-04-0013 Revision: REV0 Date:2016-4-11

东莞市蓝宇激光有限公司
Dongguan Blueuniverse Laser Co.,Ltd

DESCRIPTION. :
(规格书)
SPECIFICATION

THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co.,Ltd
AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE
MANUFACTURE OR SELL
OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

Model No. :

Document No. :
LY-WI-RD-F0314

REV
A0

遥控器使用说明

The instructions on the remote control

备注：开机默认20秒白光随后5秒开始转换

- 1.开/关机
- 2.单红
- 3.单绿
- 4.单蓝
- 5.红绿
- 6.红蓝
- 7.蓝绿
- 8.马达转速+
- 9.马达转速-
- 10.马达正转
- 11.马达反转
- 12.马达暂停/启

